


RL SERIES

ECONOMICAL ROTARY VALVES

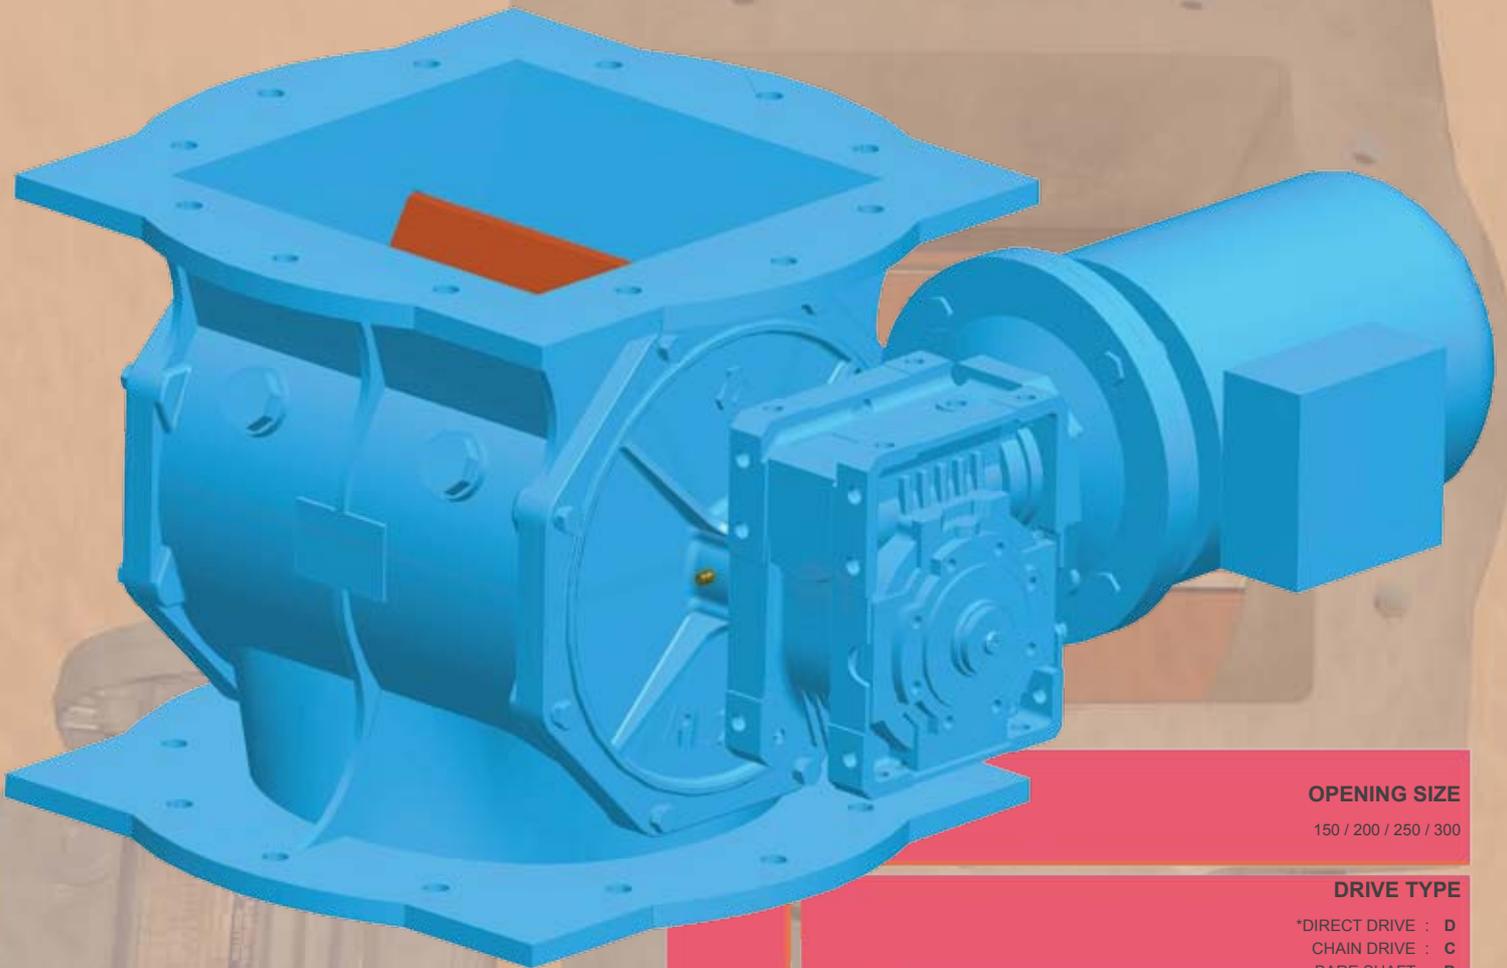

OPENING SIZE

150 / 200 / 250 / 300

DRIVE TYPE

*DIRECT DRIVE : D
CHAIN DRIVE : C
BARE SHAFT : B

ROTOR SPEED

SEALING

*ANVAL STANDARD : -

SURFACE TREATMENT

*ANVAL STANDARD : -

UNDERSPEED SENSORS


*NONE : -

RL 300 D 31 - - -

BASIC DESIGNATION


EXTENDED DESIGNATION

*DEFAULT

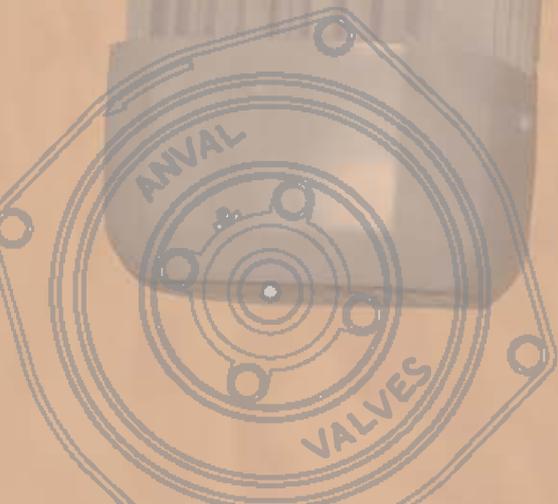


RL

DIRECT DRIVE (D) > DIMENSIONS

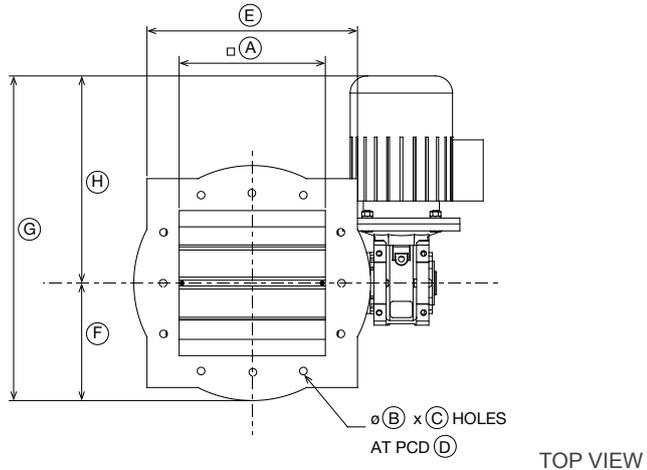

TOP VIEW

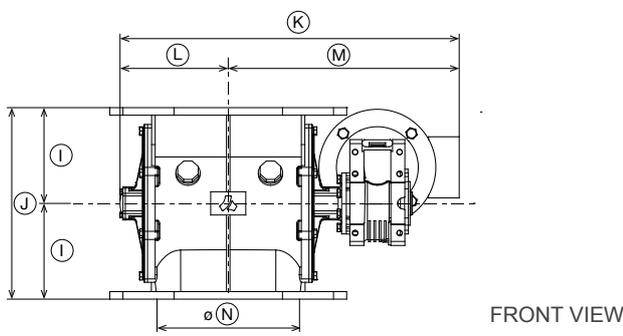

FRONT VIEW

NAME	RL 150	RL 200	RL 250	RL 300
A	150	200	250	300
B	13	13	13	18
C	8	8	12	12
D	240	295	350	400
E	250 x 250	305 x 305	360 x 360	400 x 400
F	140	170	202.5	228
G	429	459	560	616
H	289	289	357	388
I	105	135	165	200
J	210	270	330	400
K	444	492	598	649
L	140	170	203	228
M	304	322	395	408
N	147	198	249	299
NET WEIGHT	29	48	65	93
GROSS WEIGHT	38	57	90	118

ALL DIMENSIONS IN MM, WEIGHT IN KGS.

*APPROXIMATE DIMENSION ONLY. VARIES WITH MOTOR SIZE AND GEARBOX VARIATION.


CHAIN DRIVE (C) > DIMENSIONS

RL


NAME	RL 150	RL 200	RL 250	RL 300
A	150	200	250	300
B	13	13	13	18
C	8	8	12	12
D	240	295	350	400
E	250X250	305X305	360X360	400X400
F	188	170	242.5	270
G	328	386	445	498
H	140	216	202.5	228
I	105	135	165	200
J	210	270	330	400
K	382	474	564	628
L	140	170	202.5	228
M	242	304	361.5	400
N	147	198	249	299
NET WEIGHT	29	48	65	93
GROSS WEIGHT	38	57	90	118

ALL DIMENSIONS IN MM, WEIGHT IN KGS.

*APPROXIMATE DIMENSION ONLY. VARIES WITH MOTOR SIZE AND GEARBOX VARIATION.

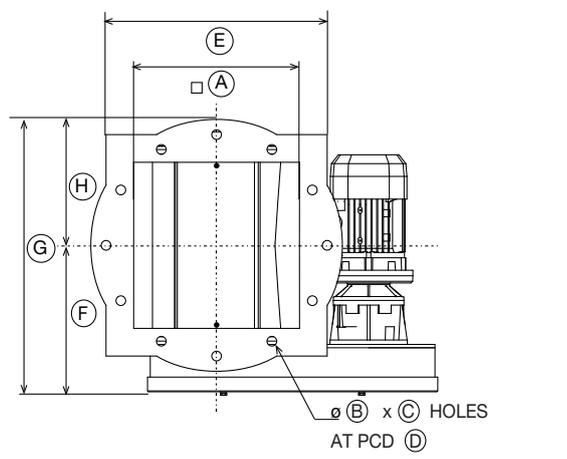


TOP VIEW

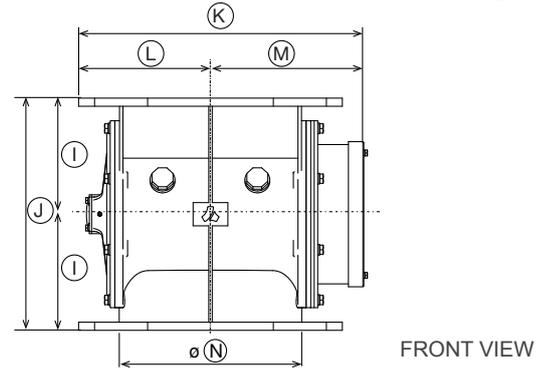

FRONT VIEW

BARE SHAFT (B) > DIMENSIONS

RL

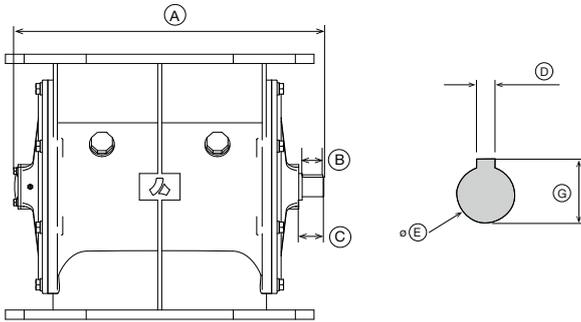

FRONT VIEW

NAME	RL 150	RL 200	RL 250	RL 300
A	294	351	416	469
B	26.5	27	34	32
C	31	31	37	37
D	8	8	8	8
E	25	25	25	30
G	28	28	28.3	33

ALL DIMENSIONS IN MM.

NOTE: RECOMMENDED FOR CHAIN DRIVE


ROTORS

RL

The standard RL Series rotor is open-end style, the most common rotor assembly design. Open rotors refers to the open pocket at each end of the rotor .

Default design comes with 6 vanes.


Rotor is perfectly designed and manufactured to have a close clearance of 0.22 mm (Max.)



OPEN ROTOR

SHAFT SEALING

RL



We are using labyrinth seal, which is a mechanical seal that fits around the axle or shaft to prevent the leakage of any particles.

Generally, Labyrinth seal is composed of many threads or grooves that are tightly fit inside the casing, thus making difficult for the dust to pass through a long and difficult path.

Labyrinth seals on rotating shafts provide non contact sealing action by controlling the passage of particles through a variety of chambers by centrifugal motion, as well as by the formation of controlled material vortices.

'Double labyrinth Seals' fitted with flock pads, and greased on each side of the valve, are standard with all rotary valves.

ANVAL STANDARD

- Longer life span
- Sealing not on the shaft
- No adjustments
- Lower total cost


RL VALVE BODY

RL

The standard RL Series body is fully cast on a single piece reducing the number of seams for wear. In addition, as all of the components are manufactured from cast iron, the valve has all of the advantages of cast iron over traditional mild steel including superior corrosion resistance, better wear properties and thermal stability.

BEST FIT FOR

- Dust collection systems
- Applications to handle eminent temperature
- Rice & Flour mill applications

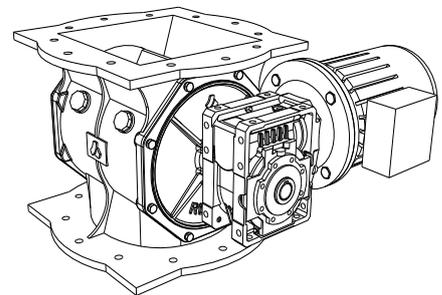

CAPACITY / MODEL SELECTION TABLE > RL


RL

MODEL	SPEED(RPM)	CAPACITY(m³/hr)
RL 150	31	4.2
RL 200	31	10.7
RL 250	31	21.2
RL 300	28	33.4


- Painting standard - Dark Grey Blue
- Drive - Bonfiglioli Standard
- End cover Material - Cast Iron
- Bearing Make - SKF

MODEL SELECTION CHART

Speed Vs Throughput

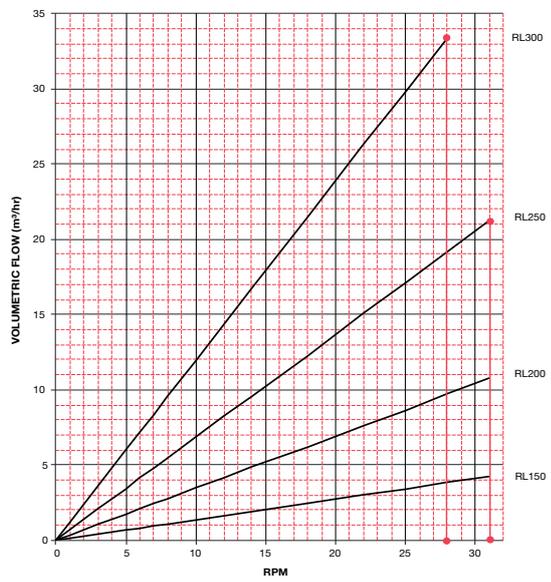

Capacity Chart

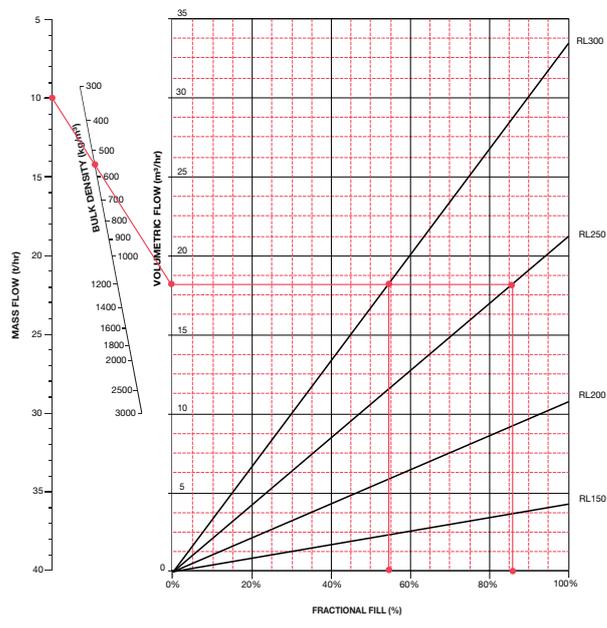

- 31 RPM DEFAULT FOR RL 150 / 200 / 250
- 28 RPM DEFAULT FOR RL 300

NOTE: THIS CHART IS PREPARED FOR THE GUIDANCE PURPOSE ONLY, CONSIDERING 100% FILLING CAPACITY.

EXAMPLE: A MATERIAL WITH A BULK DENSITY OF 550KG/M³ AND REQUIRED CAPACITY OF 10T/HR CAN BE ACHIEVED BY RL 250 & AT 86% FILLING CAPACITY WITH 31 RPM AND ALSO BY RL 300 AT 54% FILLING CAPACITY WITH 28 RPM.

NOTE: THIS CHART IS PREPARED FOR THE GUIDANCE PURPOSE ONLY, CONSIDERING MAX. RPM

CONSTRUCTION / TECHNICAL SPECIFICATIONS

BODY	: Cast Iron / SS	BEARINGS	: In board
ROTOR	: Cast Iron / SS - Open Rotor type	BEARINGS MAKE	: SKF
SIDE PLATES	: Cast Iron / SS	SHAFT	: CS1030
GEARBOX	: Heliworm Gears (D) / Helical Gears (C)	OPENING SIZES	: 150, 200, 250, 300 mm
SEALS	: Labyrinth Seals (sealing washer)	TEMPERATURE	: Built to eminent temperature
DRIVE TYPE	: Direct / Chain / Bare shaft	DIFFERENTIAL PRESSURE	: Can handle higher pressure
DRIVE	: Bonfiglioli Standard	CAPACITY RANGE	: Upto 33 m ³ /hr Max.
PAINTING STANDARD	: Dark Grey Blue	SURFACE TREATMENT (ANVAL STANDARD)	: 50µm Grey Primer 50µm Paracryl IFC (B53 Dk. Grey Blue / Y14 Golden Yellow for guards.)
SPECIAL SEALS	: Grease Purge / Air Purge		

NOTE: SPECIAL CONSTRUCTIONS ARE AVAILABLE FOR HIGHER DIFFERENTIAL PRESSURE AND TEMPERATURE.



ATEX VERSION IS ALSO AVAILABLE.

OUR LOCATIONS

Rev : Mar 2016 - 4

AUSTRALIA ☎ +61 8 9726 0988	INDIA ☎ +91 44 47400 505 / 432	UNITED KINGDOM ☎ +44 (0) 207 117 2067	SINGAPORE ☎ +61 8 9726 0988
---------------------------------------	--	---	---------------------------------------

www.anval.net | info@anval.net